


# Flange Bracket Unit

Normal Duty

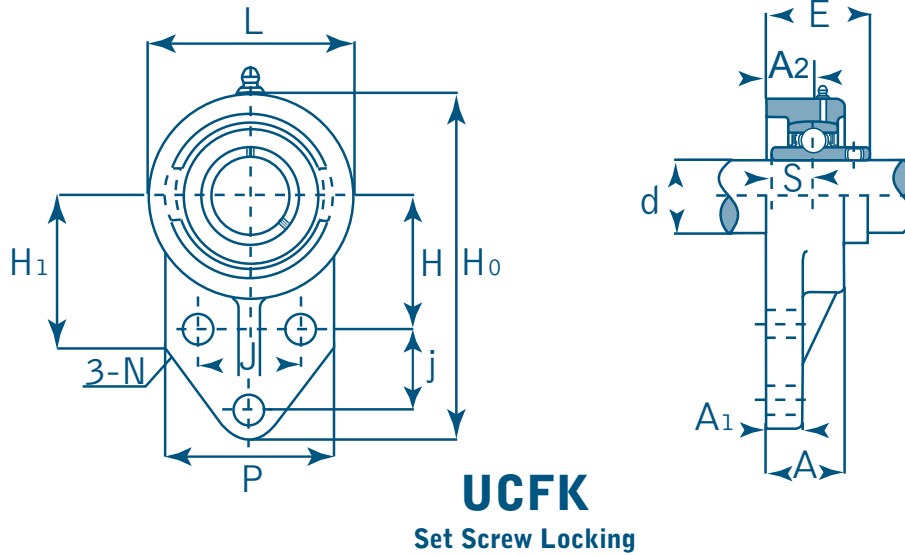

Unit No.	Shaft Dia. Inch / mm	Dimensions Inch / mm													Bolt Size	Bearing No.	Housing No.	Weight	
		H	H0	H1	L	P	J	j	A	A1	A2	N	E	S				kg	lbs
UCFK 201 201-8 202 202-10 203 203-11 204 204-12	12 mm 1/2 15 mm 5/8 17 mm 11/16 20 mm 3/4	1-21/32 42	4-11/32 110	2-1/16 52	2-7/16 62	2-1/16 52	1-1/4 32	1-1/16 27	1 25.4	1/2 13	19/32 15	13/32 10	1.2204 31	0.500 12.7	5/16 M 8	UC 201 201-8 202 202-10 203 203-11 204 204-12	FK 204	0.60	1.32
UCFK 205 205-14 205-15 205-16	25 mm 7/8 15/16 1	1-25/32 45	4-9/16 116	2-1/16 52	2-11/16 68	2-7/32 56	1-11/32 34	1-1/16 27	1-1/16 27	1/2 13	5/8 16	13/32 10	1.3385 34	0.5629 14.3	5/16 M 8	UC 205 205-14 205-15 205-16	FK 205	0.66	1.45
UCFK 206 206-18 206-19 206-20	30 mm 1-1/8 1-3/16 1-1/4	1-31/32 50	5-1/8 130	2-5/32 55	3-1/16 78	2-9/16 65	1-9/16 40	1-3/16 29	1-1/4 31	1/2 13	23/32 18	13/32 10	1.500 38.1	0.6259 15.9	5/16 M 8	UC 206 206-18 206-19 206-20	FK 206	0.93	2.05
UCFK 207 207-20 207-21 207-22 207-23	35 mm 1-1/4 1-5/16 1-3/8 1-7/16	2-11/64 55	5-11/16 144	2-7/16 62	3-17/32 90	2-3/4 70	1-13/16 46	1-1/4 32	1-11/32 34	19/32 15	3/4 19	13/32 10	1.6889 42.9	0.6889 17.5	5/16 M 8	UC 207 207-20 207-21 207-22 207-23	FK 207	1.3	2.86
UCFK 208 208-24 208-25	40 mm 1-1/2 1-9/16	2-3/8 60	6-7/16 164	2-27/32 72	3-15/16 100	3-1/16 78	1-31/32 50	1-5/8 41	1-13/32 36	5/8 16	13/16 21	15/32 12	1.9370 49.2	0.7480 19	3/8 M 10	UC 208 208-24 208-25	FK 208	1.7	3.74
UCFK 209 209-26 209-27 209-28	45 mm 1-5/8 1-11/16 1-3/4	2-9/16 65	6-27/32 174	3 76	4-3/16 106	3-5/32 80	2-1/8 54	1-11/16 43	1-1/2 38	23/32 18	7/8 22	15/32 12	1.9370 49.2	0.7480 19	3/8 M 10	UC 209 209-26 209-27 209-28	FK 209	1.9	4.18
UCFK 210 210-30 210-31 210-32	50 mm 1-7/8 1-15/16 2	2-11/16 68	7-1/4 184	3-7/32 82	4-13/32 112	3-3/8 86	2-9/32 58	1-13/16 46	1-9/16 40	23/32 18	7/8 22	15/32 12	2.0314 51.6	0.7480 19	3/8 M 10	UC 210 210-30 210-31 210-32	FK 210	2.2	4.84